



9590

Fire Door Bottom Gap Solution — Up To 90 Minutes

PRODUCT CUT SHEET

PROJECT:
SUBMITTED BY:
DATE:
NOTES:

UL Certified for Door Bottom Gaps — Measuring up to 1 1/2".




- 90-Minute Rated — for Use on UL10B and UL10C Wood or Hollow Metal Fire Doors
- Restricts the Passage of Smoke
- Patent Pending
- Available in 36" and 48" Lengths
- End Caps Furnished Standard
- Non-Handed

PRODUCT CONSISTS OF:

- + #304 Brushed Stainless Steel Neoprene Sweep — Pull Side
- + #304 Brushed Stainless Steel Intumescent Shoe — Push Side
- + #304 Brushed Stainless Steel End Caps
- + #6 X 3/4" Stainless Steel SMS Furnished

FINISH:

Brushed Stainless Steel
Neoprene is Black

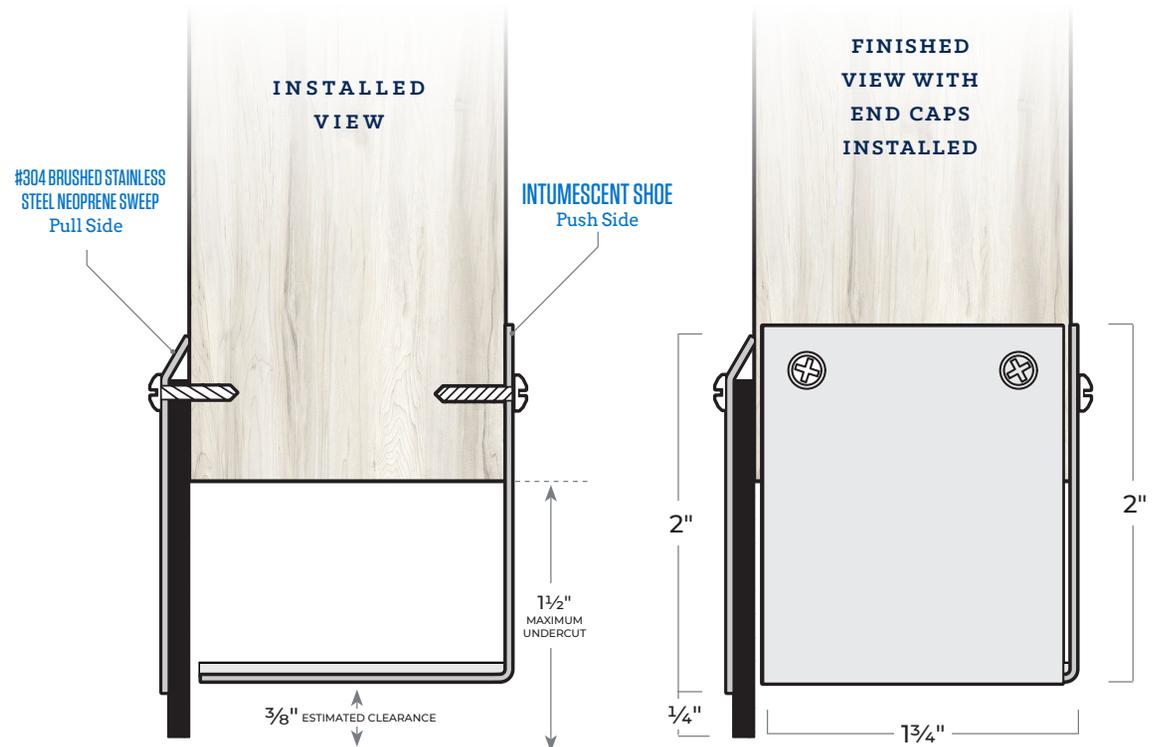

NGP-GAP-9590-PCS-0919-A

NGP MEMPHIS
4985 East Raines Road
Memphis, TN 38118
orders@ngp.com

NGP VEGAS
4584 Calimesa Street
Las Vegas, NV 89115
vegasorders@ngp.com

ngp.com
1-800-NGP-RUSH